


## DIN 3352 F4 / F5 Non-Rising Stem Resilient Seated Gate Valve 暗杆软密封闸阀 F4 / F5

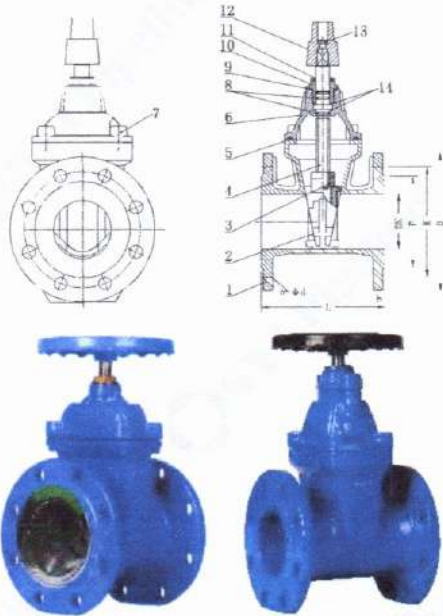

### Main Dimensions 主要尺寸:

Unit: mm

DN	L	D	K	P	b	n-φd
	F4 / F5	PN10 / PN16				
40	140/240	145	110	84	19	4-19
50	150/250	160	125	99	19	4-19
65	170/270	180	145	118	19	4-19
80	180/280	195	160	132	19	8-19
100	190/300	215	180	156	19	8-19
125	200/325	245	210	184	19	8-19
150	210/350	280	240	211	19	8-23
200	230/400	340	295	266	20	8-23/12-23
250	250/450	395/405	350/355	319	22	12-23/12-28
300	270/500	445/460	400/410	370	24.5	12-23/12-28
350	290/550	505/520	460/470	429	24.5/26.5	16-23/16-28
400	310/600	565/580	515/525	480	24.5/28	16-28/16-31
450	330/650	615/640	565/585	530/548	24.5/30	20-28/20-31
500	350/700	670/715	620/650	582/609	26.5/31.5	20-28/20-34
600	390/800	780/840	725/770	682/720	30/36	20-31/20-37
700	430/900	895/910	840	794	32.5/39.5	24-31/24-37
800	470/1000	1015/1025	950	901	35/43	24-34/24-41
900	510/1100	1115/1125	1050	1001	37.5/46.5	28-34/28-41
1000	550/1200	1230/1255	1160/1170	1112	40/50	28-37/28-44
1200	630/1400	1455/1485	1380/1390	1328	45/57	32-41/32-50

### Technical Specifications 技术参数:

**Design 设计标准:**

DIN 3352

**Face to Face 结构标准:**

EN 558 / DIN 3202-F4 / F5

**Flange Drilling 法兰钻孔标准:**

EN 1092 / DIN 2531 / DIN 2532 / DIN 2533

**Test Standard 检测标准:**

DIN 3230

**Working Temperature 工作温度:**

NBR ≤ 80° C EPDM ≤ 120° C

**Working Pressure 工作压力:**

PN10 / PN16

### Main Parts and Material 主要部件及材质:

序号 Item	部件名称 Part Name	材质 Material	序号 Item	部件名称 Part Name	材质 Material
1	阀体 Body	球铁 Ductile Iron	8	O型圈 O-Ring	EPDM
2	阀板 Wedge	球铁包胶 DI+EPDM	9	垫圈 Washer	复合材料 Composite Material
3	阀杆螺母 Stem Nut	铜 Brass	10	螺母 Nut	铜 Brass
4	阀杆 Stem	不锈钢 Stainless Steel	11	防尘圈 Anti-dust Ring	EPDM
5	垫片 Gasket	EPDM	12	阀帽 Cap	球铁 Ductile Iron
6	阀盖 Bonnet	球铁 Ductile Iron	13	螺栓 Bolt	A2-70 / A4-80
7	螺栓 Bolt	A2-70 / A4-80	14	耐磨垫 Wear Washer	复合材料 Composite Material